


**NB407AT2, AT3 TRACK DRIVES 行走齿轮箱(GFT26T2,GFT26T3)**  
**NB407AW2, AW3 WINCH DRIVES 卷扬齿轮箱(GFT26W2,GFT26W3)**

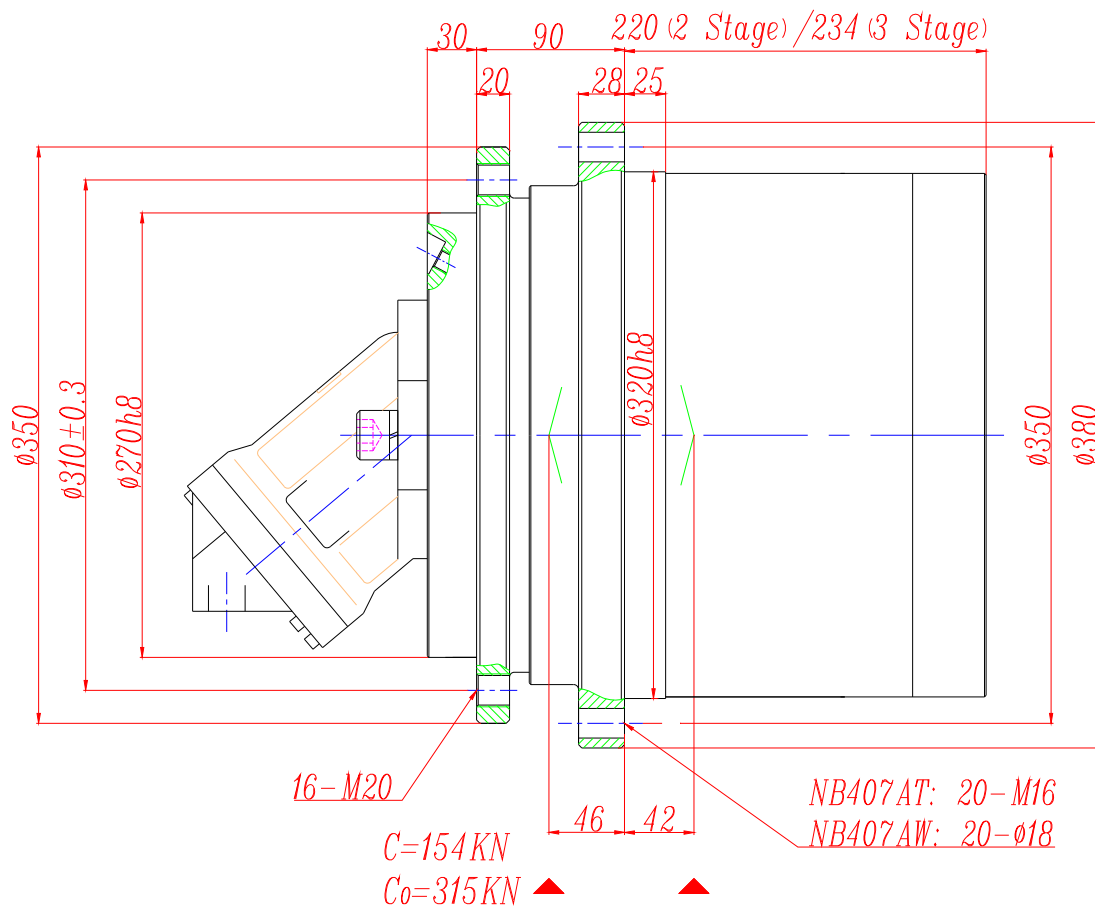

**Technical specification 技术参数**

Max.Output Torque 最大输出扭矩(N.m)		Ratio 减速比 (i)	Recommend Hydraulic Motor 推荐马达	Max. input speed 最大输入转速 (rpm)	Brake torque 制动扭矩 (N.m)	Brake work pressure 制动器推荐压力 (bar)
NB407AT	NB407AW					
26000	18000	38*, 43.2* 50.4*, 61* 63.2, 70.3 80, 94.4 110.8 136	A2FE80 · 90 A2FE45 · 56 · 63 A6VE55 · 80	4000	530 ~ 430	20-50

- Input rotation opposite output rotation. 输入转向与输出转向相反。
- Other ratio and other input type can special design. 其它的减速比和输入类型可特殊设计。
- Ratio mark \* is 2 stage. \*标记的减速比，齿轮箱为2级。